

INDUSTRIAL RTD'S

A	CODE	HEAD EXTENSION
	1	(NO EXTENSION, 0 "A" LENGTH)
	3	NIPPLE/UNION/ (NOTE 1)

B	CONNECTION HEAD			
	CODE	MATERIAL	TYPE	NEMA
	AN	ALUMINUM	WATER PROOF	4
	SN	STAINLESS STEEL	WATER PROOF, CORROSION RESISTANT	4, 4X
	AE	ALUMINUM	EXPLOSION PROOF (NOTE 2)	4
	SE	STAINLESS STEEL	EXPLOSION PROOF, CORROSION RESISTANT (NOTE 2)	4, 4X
	XD	ALUMINUM	EXPLOSION PROOF, FM, CSA APPROVED (NOTES 2 & 3)	4, 4X
	A	CAST IRON	WEATHER PROOF, RUGGED	
	AX	ALUMINUM, LARGE DEVICE, EPOXY COATED	EXPLOSION PROOF, ATEX APPROVED (NOTE 3)	4

C	CODE	CONDUIT OPENING	D	CODE	TUBE OPENING	E	CODE	"A" LENGTH
		1/2 or 3/4NPT			1/2 or 3/4NPT (NOTE 4)			IN INCHES

F	CODE	STRUCTURE
		SINGLE (LEAVE BLANK)
	D	DUPLEX

G	CODE	SHEATH DIAMETER (STANDARD 316 STN. STL.) (NOTE 4)
	316	3/16" (.187)
	14	1/4" (.250)

H	ELEMENT TYPE (NOTE 5)				
	CODE	STANDARD	MATERIAL	TCR	RESISTANCE @ 0° C.
		DIN 43760	PLATINUM	.00385	100 OHMS (LEAVE BLANK)
	PT5	DIN 43760	PLATINUM	.00385	500 OHMS
	PT1	DIN 43760	PLATINUM	.00385	1000 OHMS (LT RANGE ONLY)
	JIS	JIS-C-1604-81	PLATINUM	.003916	100 OHMS
	SA	RC21-4-1966	PLATINUM	.003923	98.129 OHMS
	CU		COPPER	.00427	10 OHMS (LT RANGE ONLY)
	NI		NICKEL	.00672	120 OHMS

J	CODE	TEMPERATURE RANGE
	LT	-58 to +500° F (-50 to +260° C.)
	MT	-58 to +900° F (-50 to +482° C.)
		-292 to +932° F (-180 to +500° C) (LEAVE BLANK)
	HT	-292 to +1202° F (-180 to +650° C) (NOTE 6)

K	CODE	SYSTEM
	2W	2 WIRE (4 WIRE TOTAL WITH DUPLEX)
		3 WIRE (LEAVE BLANK)
	4W	4 WIRE (8 TOTAL WITH DUPLEX)

L	CODE	ACCURACY
		ASTM E1137 CLASS B (LEAVE BLANK)
	CLA	ASTM E1137 CLASS A

M	PROTECTION TUBE TYPE			
	CODE	TUBE SIZE	PROCESS NPT	OD
	601	1/4" NPS	1/2" NPT	0.540
	602		3/4" NPT	
	603		1" NPT	
	606	1/2" NPS	3/4" NPT	0.840
	607		1" NPT	
	608		1 1/4" NPT	1.050
	610		1" NPT	
	611	3/4" NPS	1 1/4" NPT	
	612		1 1/2" NPT	
	613	1" NPS	1 1/4" NPT	1.315
	614		1 1/2" NPT	


N	TUBE SCHEDULE (INSIDE DIAMETER)				
	CODE	1/4"NPT	1/2"NPT	3/4"NPT	1"NPT
	40	0.364	0.622	0.824	1.049
	80	0.302	0.546	0.742	0.957
	160	N/A	0.464	0.612	0.815
	XXS	N/A	N/A	0.434	0.599

P	CODE	WELL MATERIAL
	Q	304 STAINLESS STEEL
	P	310 STAINLESS STEEL
	R	316 STAINLESS STEEL
	PLorRL	304or316 S. S. (LOW CARBON)
	N	CARBON STEEL
	J	INCONEL 600
	H	HASTELLOY C276

Q	CODE	"F" LENGTH
		IN INCHES (3" STD.)

R	CODE	"U" LENGTH
		IN INCHES

- Notes:
- (1) Standard Nipples - Steel, Schedule 40.
Standard Unions - Black Malleable Iron, 150#.
OPTIONAL STAINLESS STEEL
Nipples - 304 or 316 Stainless Steel, Schedule 40 or 80.
Unions - 304 or 316 Stainless Steel.
Example Ordering Code: 3AE 3/4 1/2 6(R or R80).
 - (2) Rated NEC class 1, Groups B, C and D.
 - (3) ATEX approved EEx d IIC, T6.
 - (4) For 1/4" and 1" pipe size a reducing bushing or enlarger will be used to fit tube opening, specify 1/2 for 1/4" pipe size and 3/4 for 1" pipe size.
 - (5) Contact factory for other sheaths and element types.
 - (6) Standard in single construction, 3 wire, class B, Inconel sheath material.
 - (7) For an item that does not fall within the catalog description an (SP) can be added to the ordering code as part of a custom construction.

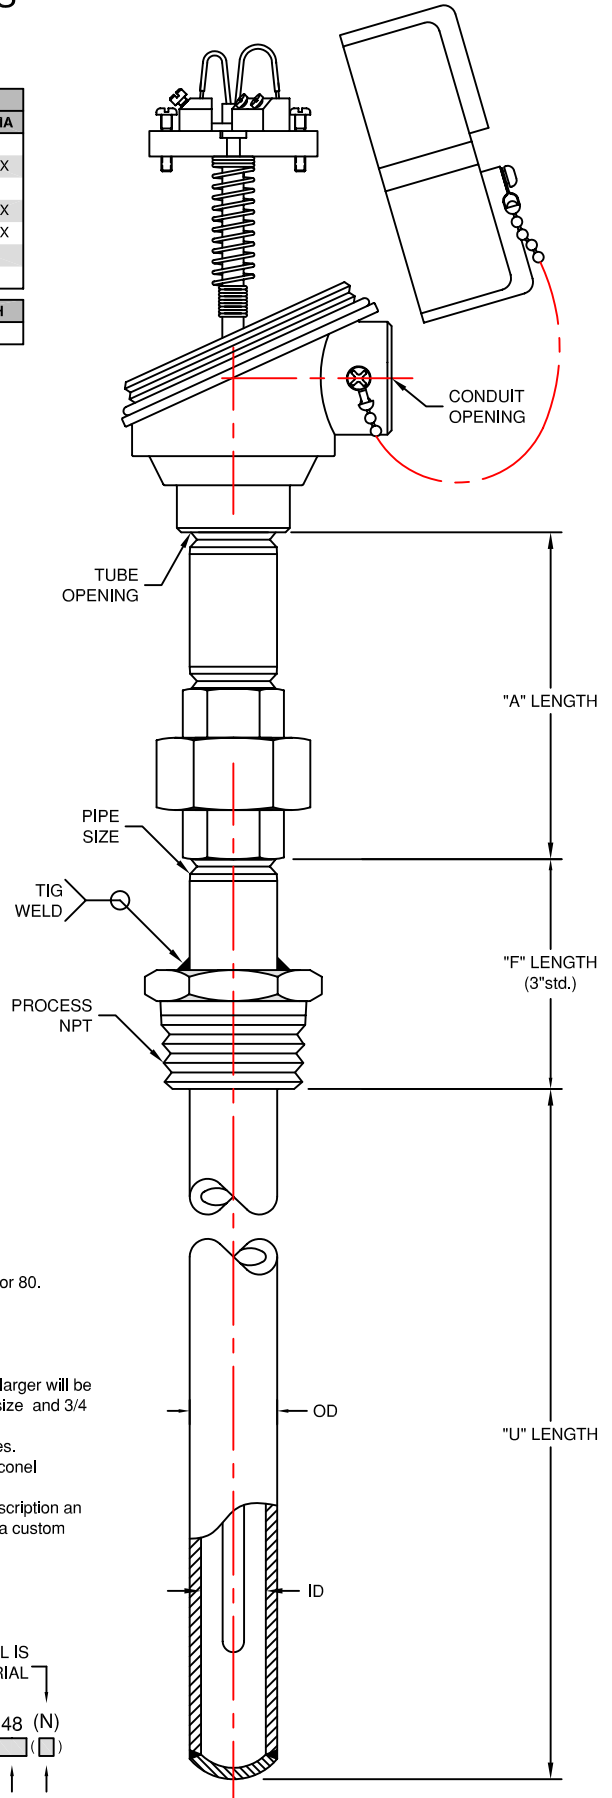

USE ONLY IF BUSHING MATERIAL IS NOT THE SAME AS TUBE MATERIAL

EXAMPLE: 3 AE $\frac{3}{4}$ - $\frac{3}{4}$ - 3 - D 14 PT5 LT 4W CLA - 611 - 80 - R - 3 - 48 (N)

A B C D E F G H J K L M N P Q R P



TEMPERATURE MEASUREMENT DESIGNER'S GUIDE
WWW.THERMO-ELECTRIC-DIRECT.COM

SECTION INRD

PIPE WELL ASSEMBLIES THREADED PROCESS CONNECTION

The information contained hereon shall be considered the sole property of Thermo Electric Company, Inc. The recipient thereof agrees not to disclose or reproduce said information to parties outside the recipient's organization without the written permission of Thermo Electric.

Doc. No.: TE-CO010109-INRD-130